

a stylish "drop-in" server system
that will suit any budget!

PRO-efficient



CHILLED MULTI DECK DISPLAY

the PRO-ficient CHILLED MULTI DECK DISPLAY

The PRO-ficient Chilled Multi Deck Display represents the very best in modular design and functionality and is used as a "drop in" unit to extend any servery layout you care to design. It can be fitted to any new or existing counter base or shopfitted unit and will add a touch of quality and style to any servery system.

Our stylish PRO-ficient units are completely self contained and designed to complement each other perfectly. When used in combination with other PRO-ficient units or as simple stand alone display, they can be relied on to perform well for many years with the minimum of maintenance.

Available in a range of sizes and finishes with many optional extras to extend functionality, the comprehensive PRO-ficient range includes: chilled and heated displays, chilled multi-decks, chilled fan blown decks and wells, chilled and heated deli units, heated bain marie units, heated ceramic hotplates, condiment and soup units, condiment and soup units.

These units comply in every respect with current CE and Food Hygiene regulations.

While all PRO-ficient units perform well and have been designed to meet client demands, PROMART recommends that a Bespoke Counter is still the best option in terms of longevity and aesthetics. PROMART reserves the right to modify designs and specifications at any time without notice.

Ideal for the display of drinks, deserts and other chilled products. The unique design uses a highly efficient circulation of cold air to maintain food at chilled temperatures not only in the refrigerated well but also on every other tier.


The recessed deck may be raised by a centrally positioned hinge mechanism in order to facilitate easy maintenance and cleaning.

The wells are covered by removable stainless steel trivet plates, which are also available in a wider range of material (Granite, Corian etc).

The unit is chilled by a robust condenser unit, which is located within an suitably sized under-slung carriage. Condensate is dealt with efficiently by an integral evaporation unit.

The Chilled Multi Deck Display is provided with an electrical control box which can be located anywhere within 1000 mm of the unit.

Available in a comprehensive range of multiple gastronorm size increments.

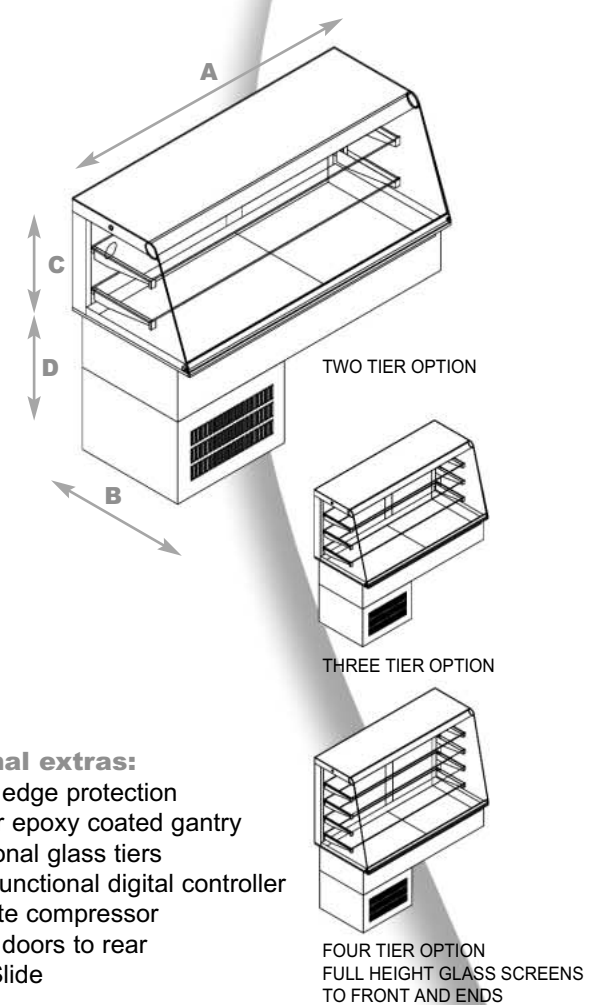

Optional extras:

- Glass edge protection
- Colour epoxy coated gantry
- Additional glass tiers
- Multi-functional digital controller
- Remote compressor
- Glass doors to rear
- Tray Slide

CHILLED TWO TIER MULTI DECK DISPLAY - All Multi Deck Displays have direct waste fittings									
Part N°	Capacity GN	Dim A mm	Dim B mm	Dim C mm	Dim D mm	Cut Out mm	Weight kg	Power	Wattage
PF-2TMD-3	3 x 1/1	1134	745	566	670	1114 x 677	150 kg	13 amp / 230 v	2500
PF-2TMD-4	4 x 1/1	1478	745	566	670	1458 x 677	190 kg	13 amp / 230 v	3000
CHILLED THREE TIER MULTI DECK DISPLAY - All Multi Deck Displays have direct waste fittings									
PF-3TMD-3	3 x 1/1	1134	745	884	670	1114 x 677	160 kg	13 amp / 230 v	2500
PF-3TMD-4	4 x 1/1	1478	745	884	670	1458 x 677	200 kg	13 amp / 230 v	3000
CHILLED FOUR TIER MULTI DECK DISPLAY - All Multi Deck Displays have direct waste fittings									
PF-4TMD-3	3 x 1/1	1434	745	884	670	1114 x 677	170 kg	13 amp / 230 v	2500
PF-4TMD-4	4 x 1/1	1478	745	884	670	1458 x 677	210 kg	13 amp / 230 v	3000